


Mask E Blue

Blue masking tape, specially designed for outdoor use in the building and construction industries, as well as for do-it-yourself applications. UV resistance up to 15 days. Recommended dry removal.

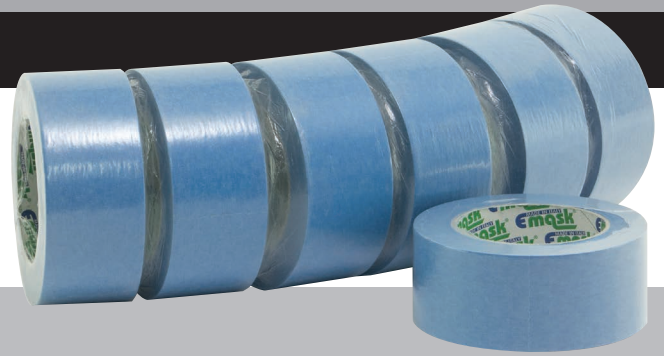

ADVANTAGES AND PERFORMANCES

- Good adhesiveness on smooth surfaces
- UV resistance up to 15 days
- Residue-free removal
- Removable without tearing
- Easy to unwind
- Hand tearable

TECHNICAL PROPERTIES

		tolerance	test method
Adhesive:	water-based acrylic emulsion		
Total thickness:	130 µm	± 10 %	AFERA 5006
Adhesion to steel:	min. 1,3 N/cm		AFERA 5001
Tensile strength:	min. 38 N/cm		AFERA 5004
Elongation at break:	min. 8 %		AFERA 5004
Colour:	blue		

The above values are the result of arithmetic averages from tests on sample productions and are not legally binding.

ARTICLES, DIMENSIONS AND BARCODES

	dimensions	pieces per box	barcode
Mask E Blue:	19 mm x 50 m	96 rolls	8051499033002
Mask E Blue:	25 mm x 50 m	72 rolls	8051499033019
Mask E Blue:	30 mm x 50 m	60 rolls	8051499033026
Mask E Blue:	38 mm x 50 m	48 rolls	8051499033033
Mask E Blue:	50 mm x 50 m	36 rolls	8051499033040

OUR PROPOSAL OF PACKAGING

- Sleeve with B/W or coloured (up to 5 colours) barcode label
- Harmonica

RECOMMENDATIONS

It's a good rule to use the product within 6 months from purchase, because the unwinding force of the tape increases with time. The product must be stored in its box in a dry location protected from sunlight, at about 15 °C - 25 °C and 50% relative humidity. If stored in different conditions, the product must be reconditioned. After application, the removal of the tape must be done slowly without tears. Before applying the tape, always check if the surface is clean. Euromask disclaims any liability for any direct or indirect damage coming from the misuse of the product. Under normal conditions, the tape is not toxic and is not approved for medical use.

The a.m. values may be changed at any moment for production needs or technical updates.

rev. 01_May 2019